

HoseSource™

QUALITY HOSE, TUBING & ACCESSORIES

www.hosesource.com

Call 866-798-0700

Fax 734-451-3527

e-mail sales@hosesource.com

Product	Description	Page
LLDPE	<i>Polyethylene Tubing</i>	4
PVC	<i>Clear Vinyl Tubing</i>	5
PVC	<i>Clear Braid Hose</i>	6
PVC	<i>Clear Wire Reinforced Hose</i>	7
PVC	<i>Air / Water Reinforced Hose</i>	8, 9, 10
AG/ Lawn	<i>Reinforced Spray Hose</i>	11, 12, 13
Urethane	<i>Polyurethane Air Hose</i>	14
Urethane	<i>Polyurethane Self Store</i>	15
PVC	<i>Reinforced Air Hose Assemblies</i>	16
Rubber	<i>Rubber Air Hose Assemblies</i>	17
	<i>Store Displays</i>	18,19
	Cautionary Statement / Limited Warranty	20

Ordering Information

Have part number and quantity

Call or Fax :

Call: 1-866-798-0700

Fax: 1-734-451-3527

Inside Sales Department

8:00 am - 4:30 pm est/edt

sales@hosesource.com

www.hosesource.com



Construction: PE-N Series PE-B Series

PE-N Linear low density polyethylene tubing natural color food grade.

PE-B Linear low density polyethylene tubing black color non-food grade.

Features :

- Economical and lightweight
- LLDPE resin provide excellent enviromental stress crack resistance
- PE-N Natural color,
- PE-B Black color
- PE-B Resistant to sunlight and other forms of ultra-violet radiation
- Excellent resistance to solvents
- Chemically inert

Applications:

- Transfer of air and liquids in Industrial applications
- Water lines
- Water softener lines
- Pneumatic logic control lines
- Vending equiptment

Sevice Temperature Range: -50°F (- 45°C) to +140°F (+ 60°C)

Note: S = Spool , C = Coil

Series	ID	OD	Wall	Max. Working PSI @ 70°F	Standard Length Available
PE-N	.170	1/4"	.040	140	2000'S, 500'S, 100'C
PE-B	.170	1/4"	.040	140	2000'S
PE-N , PE-B	.125	1/4"	.062	150	2000'S
PE-N , PE-B	.188	5/16	.062	150	1500'S
PE-N	.250	3/8"	.062	125	1500' S, 500'S, 100'C
PE-B	.250	3/8"	.062	125	1000' S
PE-N , PE-B	.375	1/2"	.062	100	500' S
PE-N , PE-B	.500	5/8"	.062	75	500' C



Construction:

CVT Series Non-Reinforced Clear Vinyl Tubing.

Features:

- High gloss crystal clear appearance with glass smooth interior to reduce sediment buildup
- FDA compliant, non-toxic PVC compound
- Self extinguishing
- Compound hardness 73 Shore "A"

Applications:

- Water distillation lines
- Air conditioning, refrigeration drainage
- Ice making machine
- Printing press equipment
- High efficiency furnace drainage

Series	Nominal ID (in)	Nominal ID (mm)	Nominal OD (in)	Nominal OD (mm)	Nominal Wall (in)	Nominal Wall (mm)	WP @70°F	Standard Length	Wgt.
CVT- 0204	1/8	3.2	1/4	6.4	1/16	1.6	65	100 ft	2.0lbs.
CVT- 0305	3/16	4.8	5/16	7.9	1/16	1.6	55	100 ft	2.7lbs.
CVT- 0406	1/4	6.4	3/8	9.5	1/16	1.6	55	100 ft	3.4lbs.
CVT- 0408	1/4	6.4	1/2	12.7	1/8	3.2	60	100 ft	8.0lbs.
CVT- 0507	5/16	7.9	7/16	11.1	1/16	1.6	50	100 ft	4.0lbs.
CVT- 0608	3/8	9.5	1/2	12.7	1/16	1.6	45	100 ft	4.7lbs.
CVT- 0609	3/8	9.5	9/16	14.3	3/32	2.4	50	100 ft	7.5lbs.
CVT- 0610	3/8	9.5	5/8	15.9	1/8	3.2	55	100 ft	10.7lbs.
CVT- 0810	1/2	12.7	5/8	15.9	1/16	1.6	30	100 ft	6.0lbs.
CVT- 0812	1/2	12.7	3/4	19.1	1/8	3.2	45	100 ft	13.4lbs.
CVT- 1013	5/8	15.9	13/16	20.6	3/32	2.4	35	100 ft	11.6lbs.
CVT- 1014	5/8	15.9	7/8	22.2	1/8	3.2	40	100 ft	16.1lbs.
CVT- 1216	3/4	19.1	1	25.4	1/8	3.2	35	100 ft	18.8lbs.
CVT- 1418	7/8	22.1	1 1/8	28.6	1/8	3.2	30	100 ft	21.4lbs.
CVT- 1620	1	25.4	1 1/4	31.8	1/8	3.2	25	50 ft	24.1lbs.
CVT- 2024	1 1/4	31.8	1 1/2	38.1	1/8	3.2	20	50 ft	14.8lbs.
CVT- 2430	1 1/2	38.1	1 7/8	47.6	3/16	4.8	30	50 ft	27.1lbs.
CVT- 2432	1 1/2	38.1	2	50.8	1/4	6.4	35	50 ft	37.5lbs.
CVT- 3240	2	50.8	2 1/2	63.5	1/4	6.4	35	50 ft	48.2lbs.



Series : CBH

Construction :

Crystal clear PVC compound, formulated with ingredients in compliance with applicable FDA requirements. Reinforced with spiraled polyester yarn and multiple longitudinal polyester yarn to reduce elongation under pressure.

Features :

- Constructed with non-toxic compounds
- Light weight
- Self extinguishing
- Non-marking
- Silicone free
- Non-conductive
- One piece lengths
- Resistant to chemicals
- Compounds hardness 73 Shore A
- NSF certified compounds available

Applications:

- Air and water lines
- Packaging machines
- Deionized water
- Car wash applications
- Pneumatics
- Air breathing lines

Service Temperature Range: +25°F (-4°C) to 150°F (+65°C)

Series	Nominal ID		Nominal OD		WP @70°F	Standard lengths		Weight	
	(In)	(mm)	(In)	(mm)		Full C oil	Cut Length	Per pkg. FC	CL
CBH- 03	3/16	4.8	.375	9.5	250	300ft	100ft	13lbs	4lbs
CBH- 04	1/4	6.5	.438	11.1	250	300ft	100ft	17lbs	6lbs
CBH- 05	5/16	7.9	.531	13.5	250	300ft	100ft	24lbs	8lbs
CBH- 06	3/8	9.5	.594	15.1	225	300ft	100ft	27lbs	9lbs
CBH- 08	1/2	12.7	.750	19.1	200	300ft	100ft	40lbs	13lbs
CBH- 10	5/8	15.9	.891	22.6	200	200ft	100ft	35lbs	18lbs
CBH- 12	3/4	19.1	1.031	26.2	150	200ft	100ft	43lbs	22lbs
CBH- 16	1	25.4	1.300	33.0	125	200ft	100ft	59lbs	30lbs
CBH- 20	1 1/4	31.8	1.620	41.1	100	100ft	50ft	45lbs	23lbs
CBH- 24	1 1/2	38.1	1.938	49.2	100	100ft	50ft	64lbs	32lbs
CBH- 32	2	50.8	2.490	63.2	75	100ft	50ft	94lbs	47lbs



Series : VTH

Construction :

Crystal clear PVC compound formulated with ingredients in compliance with applicable FDA requirements, meets USDA , 3A and NSF criteria and California Proposition 65. Reinforced with helically wound spring steel wire.

Features :


- 29.9" HG vacuum rating
- Spiral wire reinforcement prevents kinking or collapsing
- Crystal clear allows visual confirmation of product flow
- Smooth bore interior
- Electrogalvanized helical wire can be used for static dissipation when wire is ground properly
- Silicone free

Applications:

- Full vacuum lines
- Industrial vacuum lines
- Pneumatic parts transfer
- Air breathing lines
- Food and Beverage dispensing
- Car wash applications

Service Temperature Range : +25 °F (-4°C) to 150°F (+65°C)

Series	Nominal ID		Nominal OD		WP		Standard Length Coils	Approx. Wt. per Pkg.
	(in)	(mm)	(in)	(mm)	70°F 20°C	122°F 50°C		
VTH- 04	1/4	6.4	.460	11.7	150	70	100f	7lbs.
VTH- 06	3/8	9.5	.600	15.2	100	70	100ft	11lbs.
VTH- 08	1/2	12.7	.750	19.1	100	70	100ft	15lbs.
VTH- 10	5/8	15.9	.891	22.6	100	50	100ft	19lbs.
VTH- 12	3/4	19.1	1.031	26.2	70	50	100ft	24lbs.
VTH- 16	1	25.4	1.297	32.9	70	35	100ft	33lbs.
VTH- 20	1 1/4	31.8	1.609	40.9	70	35	50ft	25lbs.
VTH- 24	1 1/2	38.1	1.860	47.2	50	30	50ft	29lbs.
VTH- 32	2	50.8	2.391	60.7	50	30	50ft	42lbs.
VTH- 36	2 1/4	57.2	2.750	69.9	50	30	50ft	58lbs.
VTH- 40	2 1/2	63.5	3.000	76.2	50	30	50ft	69lbs.
VTH- 48	3	76.2	3.500	88.9	50	30	50ft	81lbs.

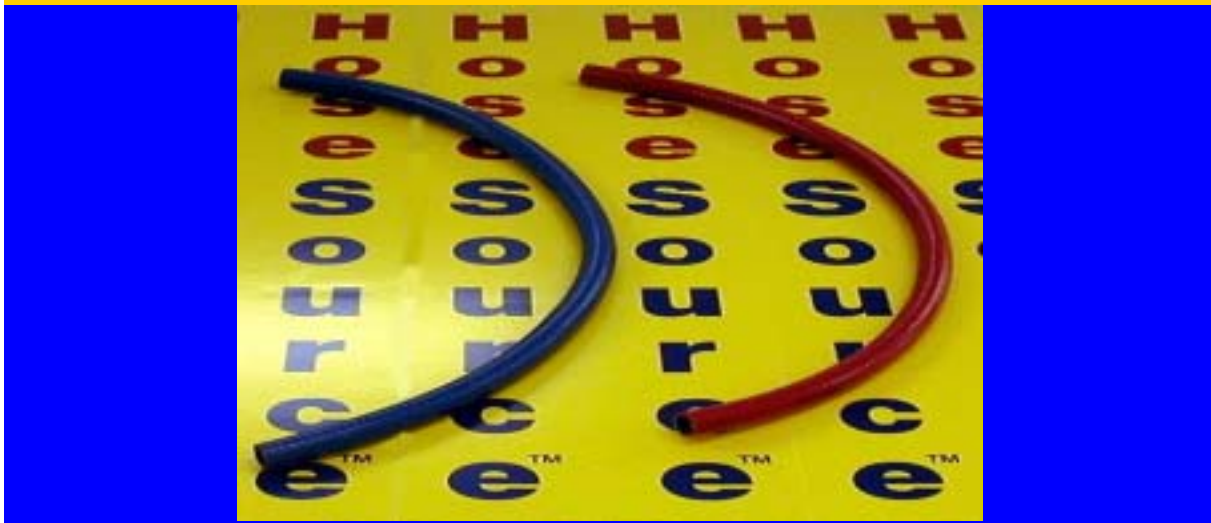

Series: GPA

Construction :

Tube—Black PVC compound

Reinforcement—High tensile strength yarn

Cover—PVC compound, available in two colors Blue and Red

Features :

- Economical, flexible and lightweight
- Excellent abrasion resistance
- U.V. and weather resistant
- Non-marking pin-pricked cover
- Silicone-free core and cover
- Complies with RMA's Class B designation for medium/ high oil resistance
- One piece packaging, no random lengths

Service Temperature Range: + 14°F (-10°C) to 150°F (+65°C)

Series	ID		OD		Max. Working Pressure		Standard Length		Approx. Wt.	
	in	mm	in	mm	@70°F	@122°	Reel	Coil	Reel	Coil
GPA	1/4	6.4	.500	12.7	300	150	500ft	100ft	44lbs.	8lbs
GPA	5/16	7.9	.625	15.9	300	150	500ft	100ft	68lbs.	13lbs.
GPA	3/8	9.5	.625	15.9	300	150	500ft	100ft	56lbs.	11lbs.
GPA	1/2	12.7	.750	19.1	300	150	500ft	100ft	77lbs.	14lbs.
GPA	5/8	15.9	.895	22.6	200	100	300ft	100ft	60lbs.	18lbs.
GPA	3/4	19.1	1.030	26.2	200	75	300ft	100ft	72lbs.	22lbs.
GPA	1	25.4	1.313	33.3	150	75	300ft	100ft	105lbs.	31lbs.



Series: PA

Construction :

Tube—Black PVC compound

Reinforced—Spiral polyester yarn with additional longitudinal yarns

Cover—PVC compound in a variety of colors

Features :

- U.V. and weather resistant
- Excellent cold weather flexibility
- Easily re-coiled after use
- Medium/High oil resistance, complies with RMA's Class B designation
- Non-marking pin-pricked cover
- Lightweight
- One-piece lengths
- Chemical resistance of PVC
- Silicone-free core and cover

Service Temperature Range: -15°F (-26°C) to 150°F (65°C)

Series	ID		OD		Max. Working Pressure		Standard Length		Approx. Wt.	
	in	mm	in	mm	@70°F	@122°	Reel	Coil	Reel	Coil
PA	1/4	6.5	.500	12.7	300	180	500ft	100ft	44lbs.	8lbs.
PA	3/8	9.5	.625	15.9	300	180	500ft	100ft	58lbs.	11lbs.
PA	1/2	12.7	.813	20.7	300	180	500ft	100ft	93lbs.	18lbs.
PA	3/4	19.0	1.125	28.6	250	100	300ft	100ft	96lbs.	30lbs.
PA	1	25.4	1.406	35.7	250	100	300ft	100ft	130ft.	41lbs.



Series: PUA

Construction:

- Tube– Grey PVC/ polyurethane alloy
- Reinforcement- High Tensile strength yarn
- Cover– PVC/ polyurethane alloy

Features :

- Grey core tube has excellent cut resistance, complies with RMA 's Class A High oil resistance
- Highly abrasion resistant alloy jacket
- Flexibility over a wide temperature range
- Available in five colors: Yellow, Red, Blue, Green and Grey

Applications:

- Transfer of air and water
- Transfer of Transmission and power steering Fluids
- Induction welding tubing lines
- Lubrication of air drop lines
- Robotic and pneumatic air lines

Service Temperature Range: 0°F (- 18°C) to +185°F (+85°C)

Series	ID		OD		Max. Working Pressure		Standard Length Reel	Approx. Wt.
	in	mm	in	mm	@70°F	@122°		
PUA	1/4	6.5	.460	11.7	300	200	500ft	37lbs
PUA	5/16	8.0	.520	13.2	300	200	500ft	44lbs
PUA	3/8	9.5	.625	15.9	300	200	500ft	67lbs
PUA	1/2	12.7	.770	19.6	300	200	500ft	88lbs
PUA	5/8	15.9	.969	24.6	300	175	300ft	76lbs
PUA	3/4	19.0	1.060	26.9	300	150	300ft	79lbs



Series: EVA-H and PE-H

Construction: Series EVA-H

- Tube—Translucent EVA copolymer
- Reinforcement—High tensile strength yarn
- Cover—Translucent EVA copolymer

Features:

- Highly flexible
- Higher working pressures
- Excellent low temperature flexibility
- Excellent chemical— resistance

Applications:

- Agricultural spay applications, including anhydrous ammonia fertilizer
- Low pressure lawn spray

Series PE-H

- Tube—Translucent LLDPE
- Reinforcement—High tensile yarn
- Cover—Translucent copolymer

Features:

- Extremely light weight
- Exceptionally low resistance to dragging.
- Excellent chemical resistant

Applications:

- Low pressure lawn spray
- Chemical foam spray
- Agricultural applications

Series	ID		OD		Max. Working Pressure @70°F	Max. Working Pressure @122°	Standard Length		Approx. Wt.	
	in	mm	in	mm			Reel	Coil	Reel	Coil
EVA-H	3/8	9.5	.594	15.1	300	100	500ft	300ft	41lbs	22lbs
EVA-H	1/2	12.7	.719	18.3	250	75	500ft	300ft	51lbs	26lbs
EVA-H	3/4	19.7	.970	24.6	150	40	—	300ft	—	36lbs
EVA-H	1	25.4	1.313	33.4	150	30	—	300ft	—	47lbs
PE-H	1/4	6.5	.457	11.6	250	100	500ft	300ft	31lbs	16lbs
PE-H	3/8	9.5	.593	15.1	250	100	500ft	300ft	37lbs	19lbs
PE-H	1/2	12.7	.740	18.8	250	100	500ft	300ft	47lbs	24lbs

Dual line available in multiple sizes and lengths. Call for information and pricing.

Polyurethane/ PVC Blend Spray Hose

HoseSource™



Series: 300WPS, 600WPS and 800TS

Construction :

- Tube—Black PVC/Polyurethane blend
- Reinforcement—High tensile strength yarn
- Cover—Ribbed PVC

Applications:

- Ag spray
- Commercial weed spray
- Pest control (300WPS, 600WPS))
- Tree spraying (800TS)

Features :

- Extremely tough and kink resistant
- Blended core provides higher chemical resistance than all PVC hoses
- Pin- Pricked cover prevents ballooning
- Ribbed cover provides excellent abrasion resistance

Service Temperature Range +15°F (-10°C) to 160°F (+70°C)

Series	ID		OD		Max. Working Pressure		Standard Length Coil	Approx. Wt.	
	in	mm	in	mm	@70°F	@122°		300'	400'
300WPS	3/8	9.5	.625	15.9	300	150	300ft or 400ft	41lbs	54lbs
300WPS	1/2	12.7	.770	19.6	300	150	300ft or 400ft	49lbs	65lbs
300WPS	3/4	19.1	1.060	26.9	200	100	300ft	80lbs	
300WPS	1	25.4	1.306	33.2	200	100	200ft	65lbs	
600WPS	3/8	9.5	.650	16.5	600	350	300ft or 400ft	41lbs	54lbs
600WPS	1/2	12.7	.790	20.1	600	350	300ft or 400ft	57lbs	76lbs
600WPS	5/8	15.9	1.030	26.2	600	300	300ft	96lbs	
600WPS	3/4	19.1	1.170	29.7	600	300	300ft	126lbs	
800TS	3/8	9.5	.650	16.5	800	450	300ft or 400ft	41lbs	54lbs
800TS	1/2	12.7	.850	21.6	800	450	300ft or 400ft	68lbs	90lbs
800TS	5/8	15.9	1.030	26.2	800	400	300ft	96lbs	
800TS	3/4	19.1	1.170	29.7	800	400	300ft	126lbs	



Series : 600 PWPS1 and 600 PWPS2

Construction :

600 PWPS1

- Tube—Yellow PVC
- Reinforcement—High tensile strength yarn with one pass spiral construction
- Cover—Yellow ribbed PVC

600 PWPS2

- Tube—Black PVC
- Reinforcement—High tensile strength yarn with two pass spiral construction
- Cover—Yellow ribbed PVC with black stripe

Features :

- Economically priced
- Ribbed cover
- Light weight
- Longitudinal reinforcing yarns
- Chemical resistance of PVC

- Ribbed cover
- Heavy duty design
- Abrasion resistant cover
- Pin pricked cover
- Chemical resistance of PVC

Service Temperature Range:

+25°F (-5°C) to 150°F (+65°C)

Service Temperature Range :

0°F (-18°C) to 150°F (+65°C)

Applications: Ag spray ● Vineyard spray ● Nursery spray ● Building washdown

Series	ID		OD		Max. Working Pressure		Standard Length Coil	Approx. Wt.	
	in	mm	in	mm	@70°F	@122°		300'	400'
600 PWPS1	3/8	9.5	.625	15.9	600	250	300ft or 400ft	35lbs	46lbs
600 PWPS1	1/2	12.7	.790	20.0	600	250	300ft or 400ft	54lbs	72lbs
600 PWPS2	3/8	9.5	.650	16.5	600	300	300ft or 400ft	45lbs	60lbs
600 PWPS2	1/2	12.7	.790	20.0	600	300	300ft or 400ft	59lbs	78lbs



Series: MAH

Polyurethane reinforced air hose made of commercial grade Industrial Urethane engineered to give long lasting work life. Super lightweight and flexible construction designed to withstand extreme hot or cold weather without loosing the superb working qualities Pro's demand.

High oil resistance, cut resistant, abrasion resistant and non-marking cover.

Service Temperature Range : -40°F (-40°C) to 185°F (+85°C)

Hose: 250 PSI @ 70°F

MAH425	1/4 ID X .395 OD X 25'	Assembled W/1/4 NPT Fittings
MAH450	1/4 ID X .395 OD X 50'	Assembled W/1/4 NPT Fittings
MAH525	5/16 ID X .472 OD X 25'	Assembled W/ 1/4 NPT Fittings
MAH550	5/16 ID X .472 OD X 50'	Assembled W/ 1/4 NPT Fittings
MAH510	5/16 ID X .472 OD X100'	Assembled W/ 1/4 NPT Fittings
MAH625	3/8 ID X .560 OD X 25'	Assembled W/ 1/4 NPT Fittings
MAH650	3/8 ID X .560 OD X 50'	Assembled W/ 1/4 NPT Fittings
MAH610	3/8 ID X .560 OD X 100'	Assembled W/ 1/4 NPT Fittings

- Also available as bulk hose without fittings, please call, fax or e-mail for details



Series: PSS

Polyurethane Self store assemblies made with commercial grade Polyurethane hose and tubing. Designed for multiple applications, standard assemblies have 4" pigtails and 20" whip ends. Male swivel brass fittings, available in four colors.

Service Temperature Range : -40°F (-40°C) to 175°F (+80°C)
 Tubing: 125 PSI @ 70°F Hose: 250 PSI @ 70°F

PSS415Y	1/4" ID X 15' Yellow	PSS615Y	3/8" ID X 15' Yellow
PSS415R	1/4" ID X 15' Red	PSS615R	3/8" ID X 15' Red
PSS415B	1/4" ID X 15' Blue	PSS615B	3/8" ID X 15' Blue
PSS415C	1/4" ID X 15' Clear	PSS615C	3/8" ID X 15' Clear
PSS415H	1/4" ID X 15' Hose	PSS615H	3/8" ID X 15' Hose
PSS425Y	1/4" ID X 25' Yellow	PSS625Y	3/8" ID X 25' Yellow
PSS425R	1/4" ID X 25' Red	PSS625R	3/8" ID X 25' Red
PSS425B	1/4" ID X 25' Blue	PSS625B	3/8" ID X 25' Blue
PSS425C	1/4" ID X 25' Clear	PSS625C	3/8" ID X 25' Clear
PSS425H	1/4" ID X 25' Hose	PSS625H	3/8" ID X 25' Hose
PSS450Y	1/4" ID X 50' Yellow	PSS650Y	3/8" ID X 50' Yellow
PSS450R	1/4" ID X 50' Red	PSS650R	3/8" ID X 50' Red
PSS450B	1/4" ID X 50' Clear	PSS650C	3/8" ID X 50' Clear
PSS450H	1/4" ID X 50' Hose	PSS650H	3/8" ID X 50' Hose

Other coil lengths and colors available as needed, please call, fax or e-mail for a quote



HoseSource™

LIGHTWIEGHT PROFFESIONAL GRADE AIR HOSE

- Oil & Abrasion Resistant
- Weather Resistant
- Non-Marking Cover
- Spiral Yarn Reinforced
- 300 PSI Working Pressure
- Custom Display's Available

SERIES: CP Commercial PVC Air Hose Assemblies

HS Part Number	Size / Length	Fittings	Color	Stock
CP-425R	1/4" ID x 25' Coil	1/4" NPT (Both)	Red	Yes
CP-450R	1/4" ID x 50' Coil	1/4" NPT (Both)	Red	Yes
CP-625R	3/8" ID x 25' Coil	1/4" NPT (Both)	Red	Yes
CP-650R	3/8" ID x 50' Coil	1/4" NPT (Both)	Red	Yes
CP-6100R	3/8 ID x 100' Coil	1/4" NPT (Both)	Red	Yes
CP-825R	1/2" ID x 25' Coil	3/8" NPT (Both)	Red	Yes
CP-850R	1/2" ID x 50' Coil	3/8" NPT (Both)	Red	Yes

Other Lengths available as Needed, please request a quote at sales@hosesource.com
 Blue and Yellow also available as needed, please request a quote.



HoseSource™

- HEAVY DUTY EXTREME TEMP AIR HOSE
 - *Commercial Grade Rubber Hose*
 - *300psi 4:1 safety factor*
 - *Tube: EPDM*
 - *Cover: EPDM*
 - *Service Temperature Range: -40°F to +180°F*

SERIES : CR - Commercial Rubber Air Hose Assemblies

HS Part Number	Size / Length	Fittings	Color	Stock
CR-425R	1/4" ID x 25' Coil	1/4" NPT (Both)	Red	As Needed
CR-450R	1/4" ID x 50' Coil	1/4" NPT (Both)	Red	As Needed
CR-625R	3/8" ID x 25' Coil	1/4" NPT (Both)	Red	Yes
CR-650R	3/8" ID x 50' Coil	1/4" NPT (Both)	Red	Yes
CR-6100R	3/8 ID x 100' Coil	1/4" NPT (Both)	Red	As Needed
CR-825R	1/2" ID x 25' Coil	3/8" NPT (Both)	Red	As Needed
CR-850R	1/2" ID x 50' Coil	3/8" NPT (Both)	Red	As Needed

If you need Tool Whips or Different lengths please contact us sales@hosesource.com
 For volume orders, other colors may be available, please call, fax or e-mail.



**We will Customize
Your Display's to
fit every stores
needs!**

HoseSource™

Quality Hose, Tubing and Accessories
120 piece Retail Metal Air Hose Rack

48" wide x 56" tall x 23" deep
Durable steel rack
Custom mix product line to fit your customers needs.
Matching product Header.

Part# MR4120

Hose Product Available:
-PVC Industrial Grade
-PVC Utility Grade
-Commercial Rubber
-Premier Rubber
-Push-Lock
-Urethane Super Light
Call for details and Specs.



HoseSource™

Quality Hose, Tubing and Accessories
40 piece Retail 2X2 Air Hose Display

24" w X 24" w X 48" h

Rugged design for long display life.
Customize product line to fit your customers needs.
Product information printed on Display.
Stand alone display fits in many area's of the store.

Part # 2X240

Hose Product Available:
-PVC Industrial Grade
-PVC Utility Grade
-Commercial Rubber
-Premier Rubber
-Push-Lock
-Urethane Super Light
Call for details and Specs.

HoseSource™